

## Wall Mount Types


### Model : WMS / WMS (c) with Louver

- Modern design
- High Efficiency Blade size 150-300 mm
- casing made from High grade PP
- Automatic shutter louver series
- Luxury Louver (WMS C with Louver)
- completed with thermal fuse to cut electric off when motor has High temperature
- Air volume = 270 - 1,110 m<sup>3</sup>/h (159-653 cfm)




**WMS**

Dimension

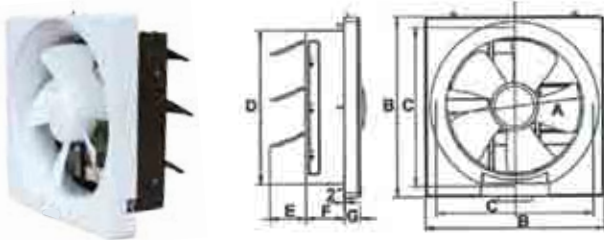

**WMS (c) with Louver**

Dimension

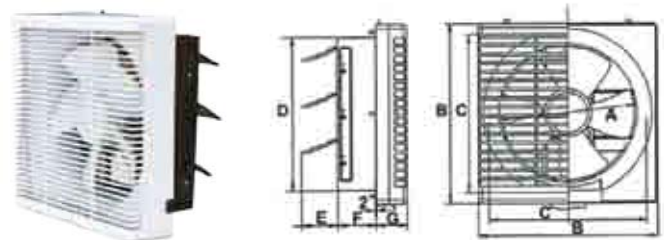

Model	Impeller (Ømm)	Voltage (Ph/V/Hz)	Power (watt)	Speed (rpm)	Volume (m <sup>3</sup> /h)	Noise@1m dB(A)	Dimension (mm)						
							A	B	C	D	E	F	G
WMS-15B	150	1/220/50	18	1520	270	38	150	244	210	193	66	78	30
WMS-15B(C)													63
WMS-20B	200	1/220/50	22	1150	492	41	200	294	260	243	84	67	30
WMS-20B(C)													62
WMS-25B	250	1/220/50	30	1200	750	43	250	344	310	293	68	75	30
WMS-25B(C)													59
WMS-30B	300	1/220/50	35	1120	1110	49	300	401	360	343	82	82	32
WMS-30B(C)													60

## Window Mount Types


### Model : WMR

- Modern design
- High Efficiency Blade size 150 – 200 mm
- casing made from High grade PP
- Cord-operated shutter series
- Completed with thermal fuse to cut electric off when motor has High temperature
- Air volume 192-276 m<sup>3</sup>/h , (113-162 cfm)



**WMR**

Dimension

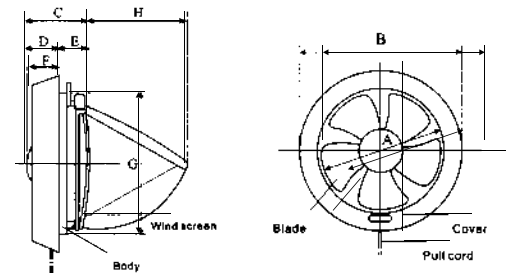

Model	Impeller (Ømm)	Voltage (Ph/V/Hz)	Power (watt)	Speed (rpm)	Volume (m <sup>3</sup> /h)	Noise@1m dB(A)	Dimension (mm)							
							A	B	C	D	E	F	G	H
WMR-15C	150	1/220/50	19	1980	258	45	150	208	85	44	41	40	177	130
WMR-20C	200	1/220/50	23	1920	384	49	200	272	100	44	48	43	238	180

