


# Ceiling Mount Types

## Model : CFM

- New design with Super Low noise
  - Forward Blade size 150 – 200 mm
  - Casing and Louver made from steel with anticorrosive color
  - Maintenance free for ball bearing
  - Single wind shield for anti-back spin of Air flow
  - Completed with thermal fuse to cut electric off when motor has High temperature
- air volume 120-960 m<sup>3</sup>/h , (70-565 cfm)



**ENERGY SAVING**

## PERFORMANCE CURVE

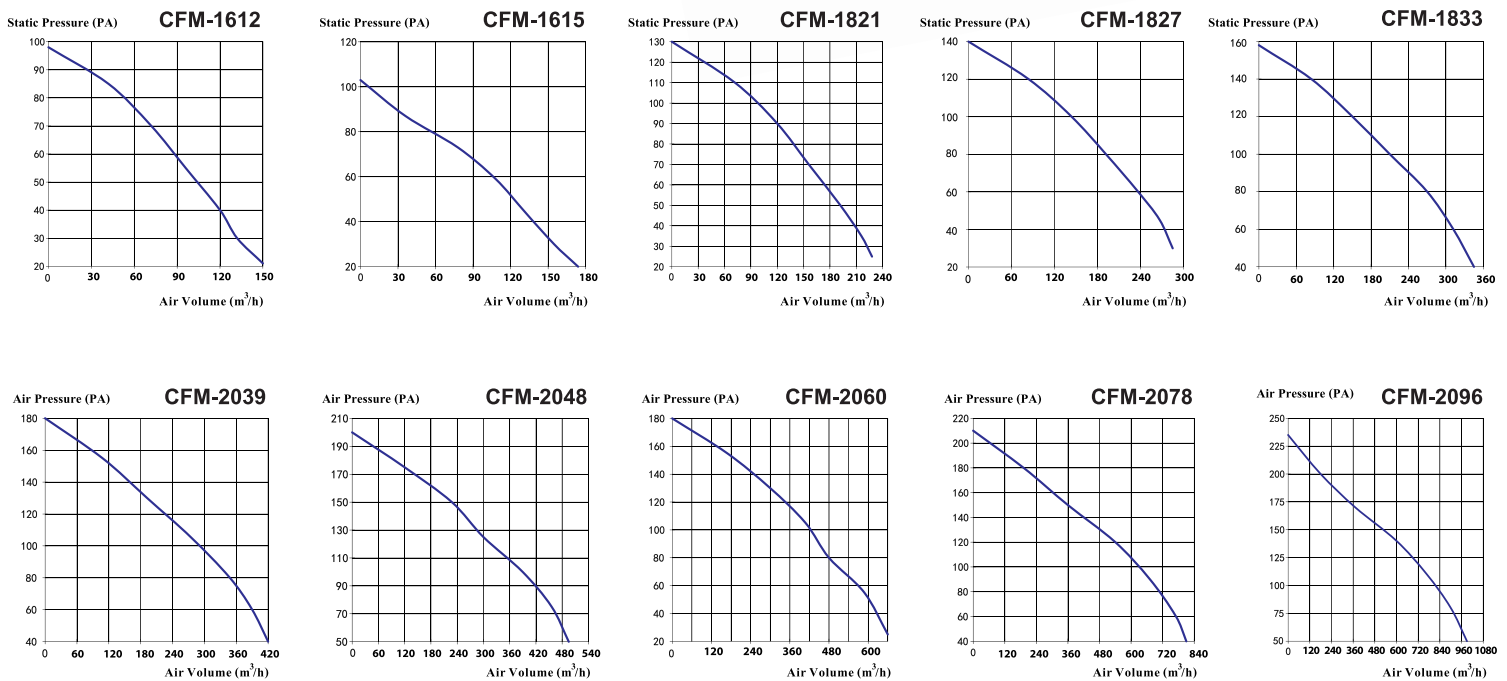

## CFM

## Dimension

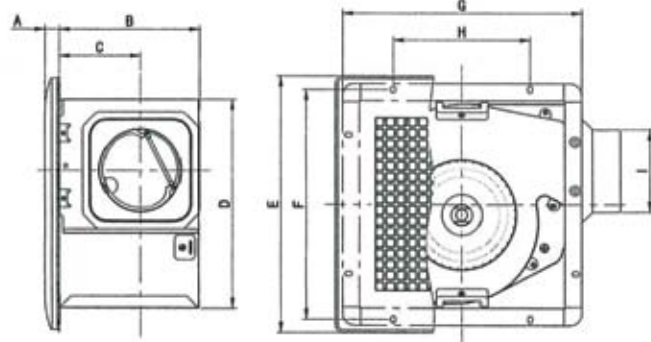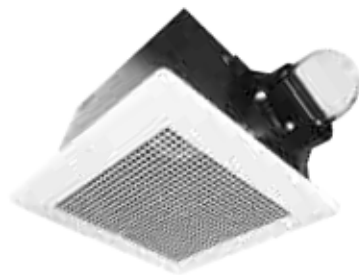

Model	Impeller (Ømm)	Voltage (Ph/V/Hz)	Power (watt)	Speed (rpm)	Volume (m <sup>3</sup> /h)	Noise@1m dB(A)	Dimension (mm)									
							A	B	C	D	E	F	G	H	I	Louver size
CFM-1612	150	1/220/50	16	690	120	34	17	163	95	241	297	266	280	160	98	305
CFM-1615	150	1/220/50	19	780	150	37	17	163	95	241	297	266	280	160	98	305
CFM-1821	180	1/220/50	26	520	210	38	17	188	106	281	346	317	336	180	123	356
CFM-1827	180	1/220/50	32	640	270	41	17	188	106	281	346	317	336	180	123	356
CFM-1833	180	1/220/50	37	735	330	45	17	188	106	281	346	317	336	180	123	356
CFM-2039	200	1/220/50	45	600	390	42	17	228	115	311	370	336	350	200	148	381
CFM-2048	200	1/220/50	68	738	480	46	17	228	115	311	370	336	350	200	148	381
CFM-2060	200	1/220/50	98	760	600	46	17	228	115	311	370	336	350	200	148	381
CFM-2078	200	1/220/50	147	820	780	46	17	228	115	311	370	336	350	200	148	381
CFM-2096	200	1/220/50	172	970	960	50	17	228	115	311	370	336	350	200	148	381